O.M.B. No 3067-00 Expires May 31, 19

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	Instructions for co	inpletting tins i	offit can be found on the	ic following pag	geo.		
	FOR INSURANCE COMPANY USE						
BUILDING OWNER'S NAME E. Wayne Demo	POLICY NUMBER						
STREET ADDRESS (Including April 16331 Reding to	COMPANY NAIC NUMBER						
OTHER DESCRIPTION (Let and	Block Numbers, etc.) ddition to Red	ingtor Bea	ch Homes				
сıтү Redington Beac				STATE F1	ZIP CODE		
		OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION			
Provide the following from t	he proper FIRM (See	Instructions):					
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)		
#125104	0001	С	3/2/83	A - 12	10		
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE:							
SECTION C BUILDING ELEVATION INFORMATION							
describes the subject building's reference level \$\frac{3}{2}\$. 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of \$\frac{1}{2}\$. 1 feet NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of \$\frac{1}{2}\$. 1 feet NGVD (or other FIRM datum—see Section B, Item 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is \$\frac{1}{2}\$. 1 feet above \$\frac{1}{2}\$ or below \$\frac{1}{2}\$ (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is \$\frac{1}{2}\$. 1 feet above \$\frac{1}{2}\$ or below \$\frac{1}{2}\$ (check one) the highest grade adjacent to the building. 1 for flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? \$\frac{1}{2}\$ Yes \$\frac{1}{2}\$ No \$\frac{1}{2}\$ Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: \$\frac{1}{2}\$ NGVD '29 \$\frac{1}{2}\$ Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: \$\frac{1}{2}\$ Yes \$\frac{1}{2}\$ No (See Instructions on Page 4) 5. The reference level elevation is based on: \$\frac{1}{2}\$ actual construction \$\frac{1}{2}\$ construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A							
Section B, Item 7).	st grade infinediately	adjacent to the	. Juliang 15.				
			MMUNITY INFORMATIO				
If the community official resistance is not the "lowest floor" as floor" as defined by the or 2. Date of the start of construction.	s defined in the commodinance is:	nunity's floodpla	ain management ordinand	e, the elevation	of the building's "lowest		

SECTION E CERTIFICATION


This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation in tion when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required.

Co. Junity officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-II the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

L.R.Penny		#1472				
CERTIFIER'S NAME	L.R.Penny & Assoc					
TITLE	* COMPANY NAME					
IDDRESS	CITY		STATE	ZIP		
3225 - 108th Avenue N.	Largo		FL	34644		
IGNATURE SAUVUNU PER	Immel .	9/7/90 ^{ATE}	595H2V97_			
Copies should be made of this Certificate COMMENTS:	for: 1) community off	icial, 2) insurance age	ent/company, and 3) build	Ing owner.		
	100000000000000000000000000000000000000					
	ترسيد					
	-	***				

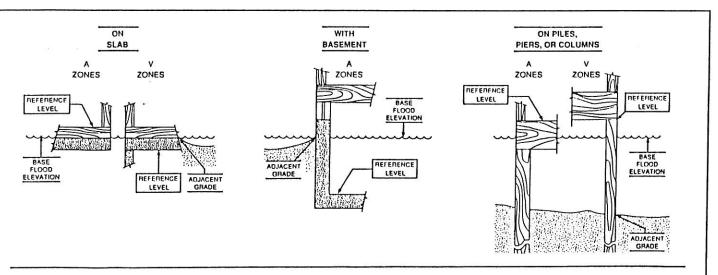

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. ations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

被關鍵級使用限制整数的政治的pppelled pppelled pppell